

Air springs suspension MERCEDES SPRINTER 906 VOLKSWAGEN CRAFTER 2 strengthening kit MS-2 KRD-2

APPLICATION – pneumatic suspension MERCEDES SPRINTER 906,
VOLKSWAGEN CRAFTER 2 , set , kit – reinforcement of springs

YEAR OF PRODUCTION: **VI 2006 – 2019**

DRIVE: **rear axle**

WHEEL: **single**

A set includes all necessary components allowing for easy installation, with no interference in a vehicle suspension.

Air springs are screwed in the place of a rubber buffer (NO need of cutting, welding, making additional details).

Required pressure in a pneumatic set:

min. 1 atm.

max. 8 atm.

Pressure to be regulated depending on a vehicle load.

POSSIBILITY TO BUY SPARE PARTS FOR A SET (air springs, manometers, connecting pieces etc.).

PERFECT FOR USE IN VEHICLES WITH A TOTAL WEIGHT OF UP TO 6 TONNES

Rolling lobe air springs (straight air springs) are characterized by a bigger scope of operational heights and more effective reduction of vibration (smooth operation due to rolling down the piston of an air spring). Because of the load capacity larger by 100% (1.5 t / 1 air bag) in comparison with double convoluted type of air springs (snowman type) with similar dimensions, straight air springs can be used in vehicles with a bigger total weight.

[Learn more...](#)


MANUFACTURER – Rolgum, Poznań, PL



Sposób montażu zestawu wzmacniającego

MS-2 MERCEDES SPRINTER

od VI 2006 r., napęd tył, pojedyncze koło

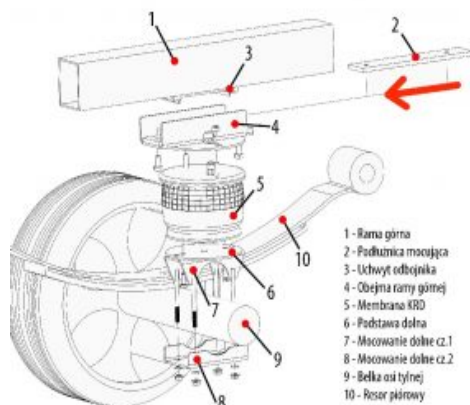

- 1 - Rama górna
- 2 - Poduszka mocująca
- 3 - Uchwyt odbojnika
- 4 - Obejma ramy górnej
- 5 - Membrana KRD
- 6 - Podstawa dolna
- 7 - Mocowanie dolne cz.1
- 8 - Mocowanie dolne cz.2
- 9 - Belka osi tylnej
- 10 - Resor płórowy

1. Identyfikacja odbojnika.
2. Wyciągnięcie poduszki (2) z uchwytu odbojnika (3) pod ramą górną (1).
3. Złożenie 1/2 odbojnika (4) na ramę górną (1) i odbojnika (5) na ramę dolną (6).
4. Przykrycie ramy górnej (4) i ramy dolnej (6) odbojnikami (5) i (4).
5. Przykrycie poduszki (2) i ramy (4) i (6) odbojnikami (5) i (4).
6. Przykrycie ramy górnej (4) i ramy dolnej (6) odbojnikami (5) i (4).
7. Złożenie ramy górnej (4) i ramy dolnej (6) na ramę górną (1).

Rolgum S.C. ul. Splawie 64 61-312 Poznań

